
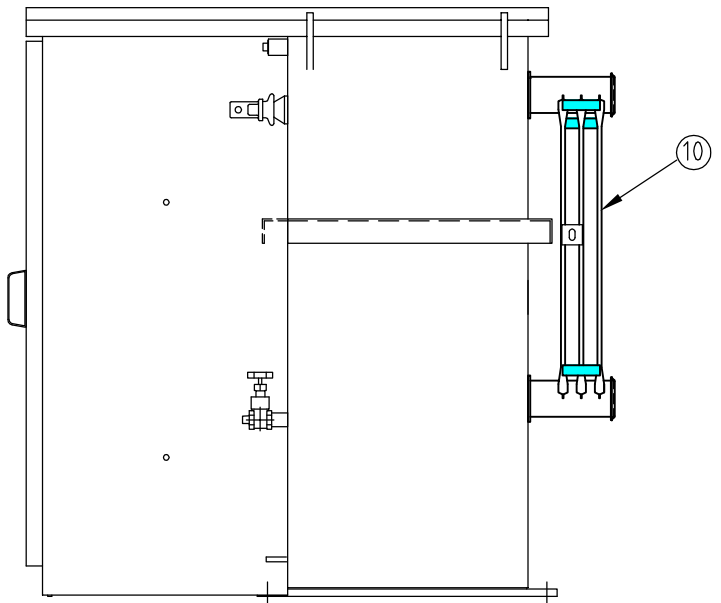
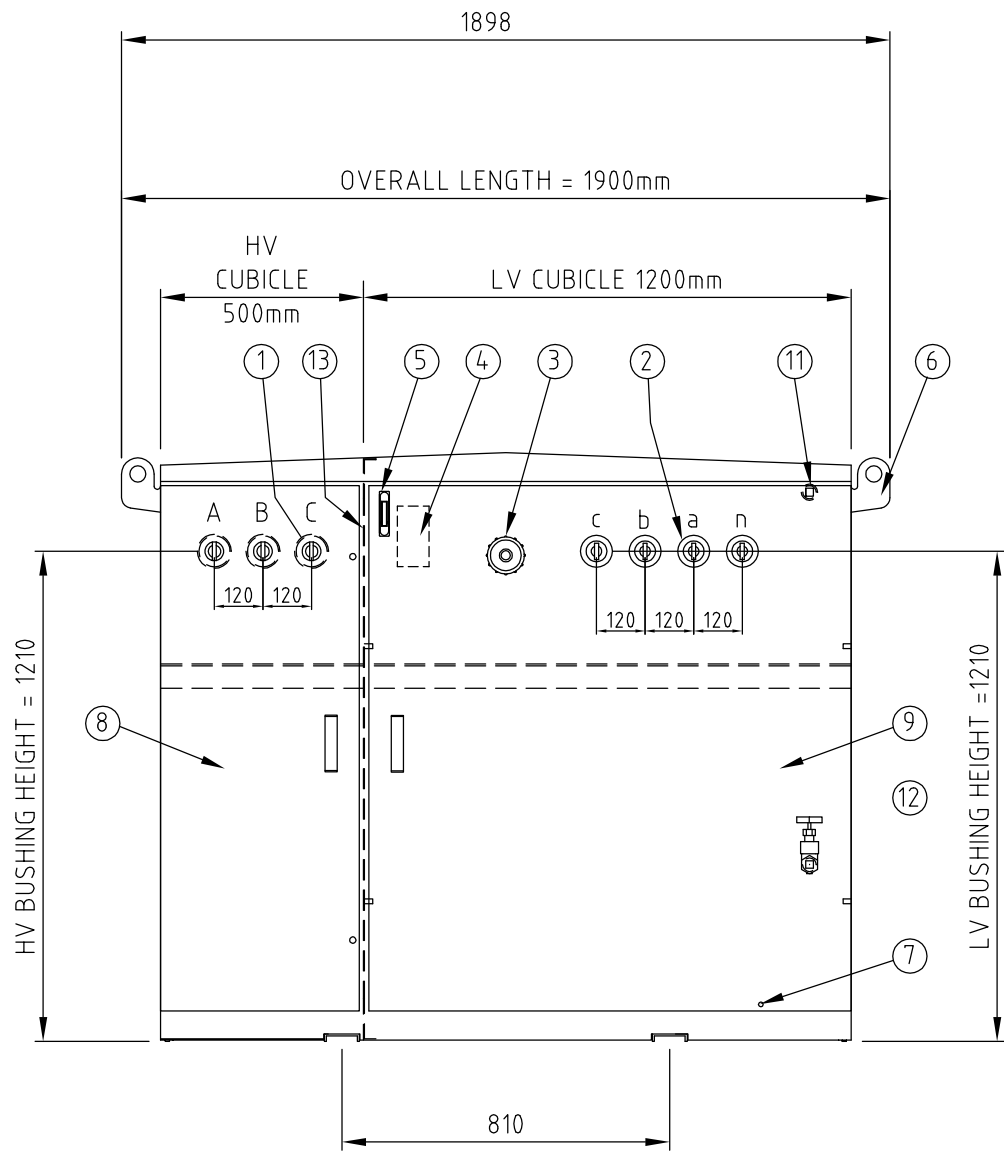


kVA	OIL Litres	UNTANKING MASS kg	TOTAL kg
300	620	780	1855

ITEM	DESCRIPTION
1	HV 11kV TWO PIECE CABLE BOX BUSHING 160A
2	LV BUSHING 415V ESAA No.72 500A
3	TAPSWITCH HANDLE & LOCKING BRACKET
4	RATING PLATE
5	OIL GAUGE
6	LIFTING LUG
7	EARTH STUD M12 STAINLESS STEEL
8	HV COMPARTMENT
9	LV COMPARTMENT
10	COOLING RADIATORS
11	FILLER & FILTER SOCKET 25NB
12	DRAIN VALVE 25NB
13	COMPARTMENT SEGREGATION

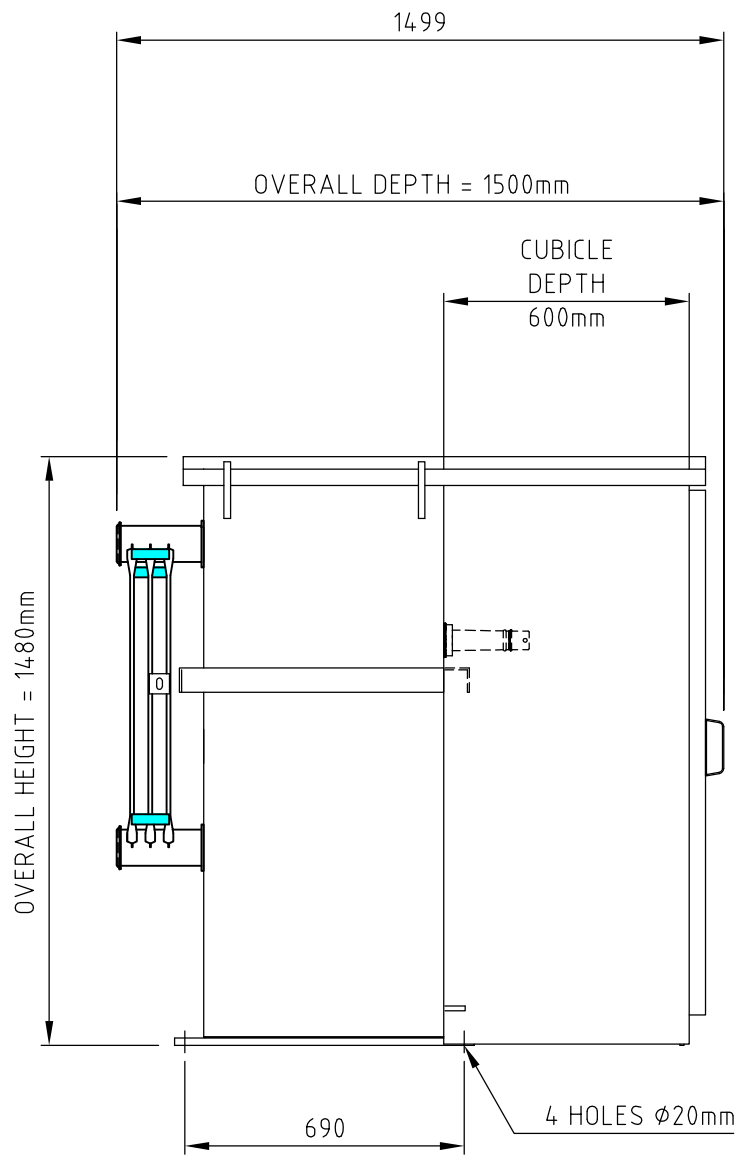

REV	DESCRIPTION	DRAWN	DATE	APPD.	DRAWN	JAYESH
B	STIFFENERS UPDATED	A.R.	6 AUG 15	.	DATE	20 AUG 2012
C	TAPSWITCH REPLACED	J.S	20 AUG 18	M.Z	CHECKED	VIRGILIO
.	.	.	.	.	DATE	20 AUG 2012
.	.	.	.	.	SCALE	1=20
.	.	.	.	.	TOLERANCE	+/- 2mm

GENERAL ARRANGEMENT 300kVA 3Ø 11kV/415-240V Dyn11 FRONT ACCESS KIOSK TRANSFORMER HV CUBICLE 600mm DEEP & 500mm WIDE LV CUBICLE 600mm DEEP & 1200mm WIDE
904.0300.3602

ETEL Distribution Transformers	
DRAWING No. 039.904.0748	REV C